


NOTE:
⚠ ALT. SOLDER PER MIL-S-4573E,
INSULATE WITH M23053/5-104-0.

ECO	SHEET	REV	DATE	DESCRIPTION	DRW	CHKD	APR
	1	NC	06/05/97	INITIAL RELEASE	REB	LS	REB
	1	A	11/12/18	SHRINK TUBE WAS CLR & PN WAS TSP1.5BK, MIL-W-22759/41-22-9 WAS MIL-W-22759/16-22-* AND CORRECTED LENGTH FROM 12', ADDED SOLDER SLEEVE & CHANGED SOLDER TO ALT.	ZA	LS	GR

ASSEMBLY	L1 (in)	L2 (in)
-1	4.0	10.0

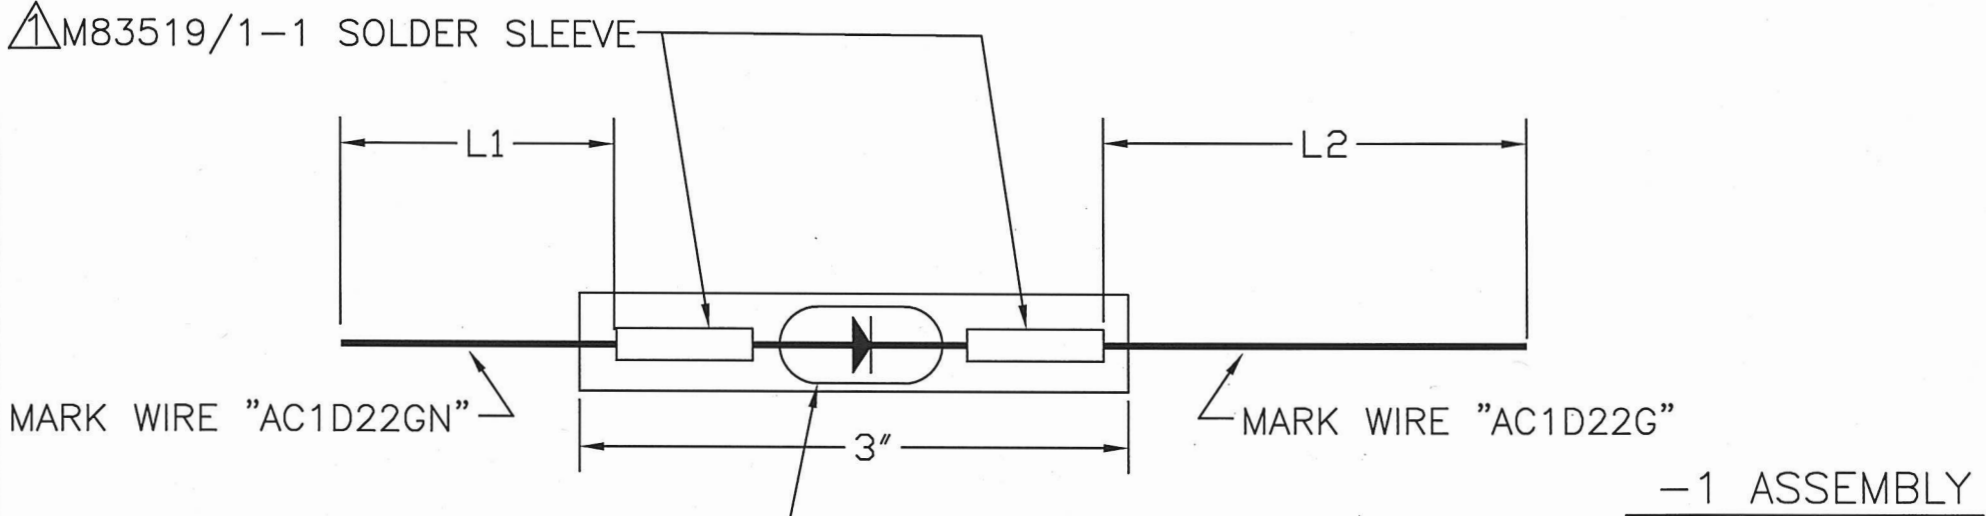

2	M83519/1-1	SOLDER SLEEVE
1	NTE 5800	DIODE
3'	M23053/5-206-C	SHRINK TUBE, CLEAR
14'	MIL-W-22759/41-22-9	22 AWG WIRE
-1	ASSY	PART NUMBER
QTY.	Paravion™ Inc. ✓ Technology	DESCRIPTION
DIMENSIONS IN INCHES		TITLE DIODE ASSEMBLY
TOLERANCES EXCEPT WHERE NOTED:		DRAWING NO. 407AC-6118
.X = ± .1		DRAWN BY
.XX = ± .05		APRVD. BY
.XXX = ± .010		CHK'D BY
ANGLES = ± 1°		DATE
		REV
		ECO
		A
		SHEET
		1 OF 1
		DO NOT SCALE DRAWING
		© 2018 PARAVION TECH, INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY, INC.

BREAK ALL SHARP EDGES